

# LeBra®

## Owner's Manual

Model #55500—LeBra®

Dodge RAM Truck


### About Your Global Accessories Product

Congratulations on your purchasing decision. Global Accessories, Inc. designed the LeBra® Front End Cover to be the very best available. With proper care, your LeBra® Front End Cover will provide years of stylish looks and maximum protection.

Installation of the LeBra® Front End Cover is a simple process that should take about 30 minutes. Removal and reinstallation (as for car washing) takes just a few minutes.

If you encounter any problems during the installation of your LeBra® Front End Cover, please contact our Consumer Response Department, Monday - Friday, 9AM - 4PM (MST) at 1-800-950-9502.

**Note:** Please read this manual thoroughly before beginning the installation. After completing installation, keep this manual for further reference.

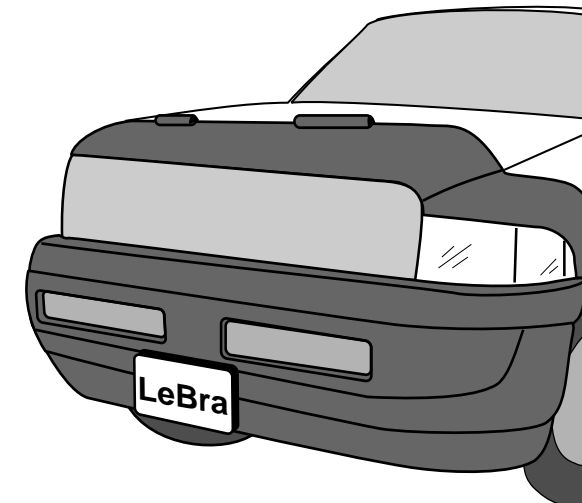

### Tips for Easier Installation and Care

- [] Before Installation, wash and wax your vehicle. Use a paste wax—not a spray—on the hood and fenders in order to maintain the finish underneath the LeBra® Front End Cover.
- [] Install the LeBra® Front End Cover in temperatures of 70°F (21°C) or higher. The warmth will make the fabric more pliable and will allow it to stretch slightly for a tighter and smoother fit.
- [] Do not use vinyl cleaners or protectants on your LeBra® Front End Cover. These cleaners reduce the breathability of the vinyl and will void the Global Accessories Warranty.
- [] Do not install the LeBra® Front End Cover on any vehicle that does not still have its original factory paint. Global Accessories will not be held liable for any warranty claims of paint damage to repainted vehicles.
- [] Remember that the LeBra® Front End Cover also protects paint from fading due to sunlight while the rest of the car is exposed. Global Accessories will not be held liable for any warranty claims on sun-faded paint.
- [] **Caution:** There may be elastic straps described in some sections of this manual that can snap back if not properly hooked. To avoid injuries, exercise caution and use safety glasses when installing.
- [] Where available, always use the loops sewn to the cover to remove the plastic clips. **DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER.** When removing the cover, it will be easiest to reverse the installation steps.

<b>Contents</b>	
Parts List	Pg. 2
Installation Instructions	
Hood Cover	Pg. 2
Fender Covers	Pg. 2

**Unpacking: What You Have**

Remove all parts from the shipping container. Check each part included against the following Parts List and look for any possible damage from shipping.

**Parts List**

Item	Description	Qty
1	Cover, hood	1
2	Cover, fender - driver	1
3	Cover, fender - passenger	1
4	Warranty	1
5	Care and Maintenance Pamphlet	1

The right side of the fabric is indicated as:



**The Hood Cover**

One of the features that makes your LeBra® Front End Cover the very best available is the separate Hood Cover. This means that you can access the engine compartment without removing or adjusting the cover. Install the Hood Cover first, by following these steps:

*Step One*

Open the hood and slip the pockets in the Hood Cover over the bottom corners of the grille. Make sure that the corners of the grill fit snugly into the corners of the Hood Cover. When the Hood Cover fits snugly, stretch the fabric at straps to remove major wrinkles.

**Note:** Do not hook the plastic clips at this time.


*Step Two*

Pull one of the straps sewn to the Hood Cover to the hole in the hood's underside, as shown in Figure 1. Adjust the Buckle Hook so that it is about 1/2" away from the hole. Now pull the strap down and slip the Buckle Hook into the hole. To release the tension on the webbing for adjustment of the strap, simply pull out on the tab on the Buckle Hook (see Figure 2).


The Strap should be quite taut (as taut as possible without tearing). Relocate the Buckle Hook if necessary to tighten. Tie off excess strap to keep free of the engine compartment. Repeat this process for the other side.

*Note:* Check all straps periodically to insure tension. Adjust tightness if necessary.

**Figure 1**

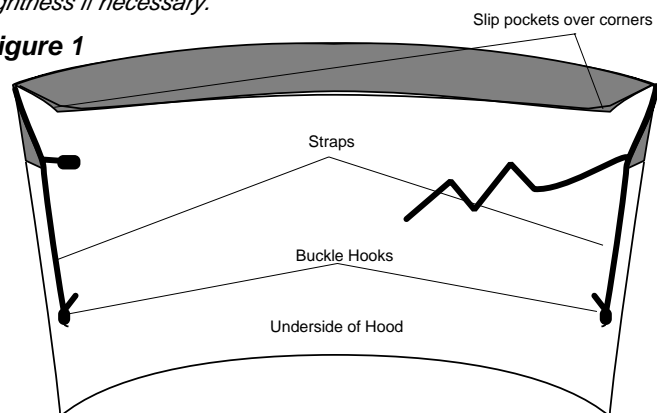


**Figure 2**

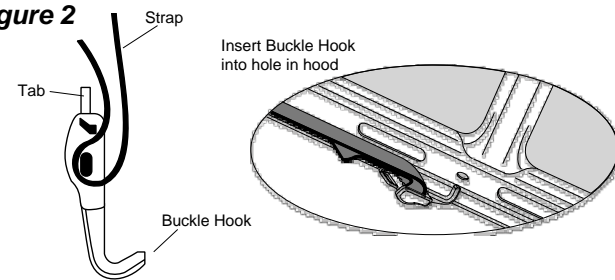

*Step Three*

With the Hood Cover in place, pull the fabric on the sides of the hood around to the underside of the hood on both sides. This will insure maximum tightness of the Hood Cover (see Figure 3).


**Figure 3**

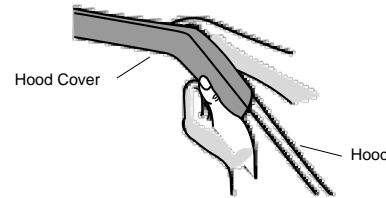


*Step Four*

The remaining strap provides better tension and stability for the cover. Stretch the remaining strap across the underside of the hood and thread it through the buckle on the opposite side (see Figure 4a). Pull the strap as tight as possible. Loop the excess strap back through the buckle to keep it out of the engine compartment (see Figure 4b). Again, make sure the strap is taut.


**Figure 4**

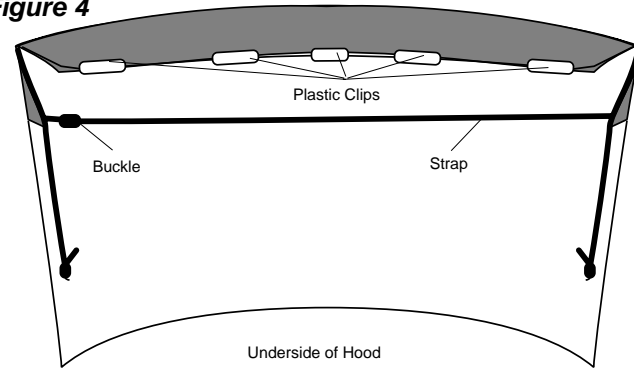

**Figure 4a**

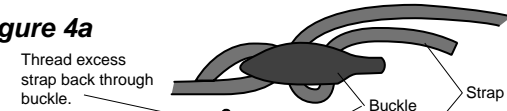

**Figure 4b**



*Step Five*

Locate the plastic clips sewn to the cover along the bottom of the grille screen (see Figure 4). Hook the clips to the bottom of the grille.

**Installing the Fender Covers**

This section explains how to install the fender cover portion of your LeBra® Front End Cover.


*Step One*

Orient the covers on the vehicle. Passenger or driver and the bottom of the cover will be stamped on the inside.

*Step Two*

Slip the hard vinyl strip sewn to the top of the cover between the top of the headlight and the fender. There is a small plastic strip sewn to the end of the hard vinyl. Reach in above the headlight and use the loop sewn to the cover to pull the plastic strip through to the engine compartment side until it hooks to the ledge behind the headlight panel.

**Figure 5**

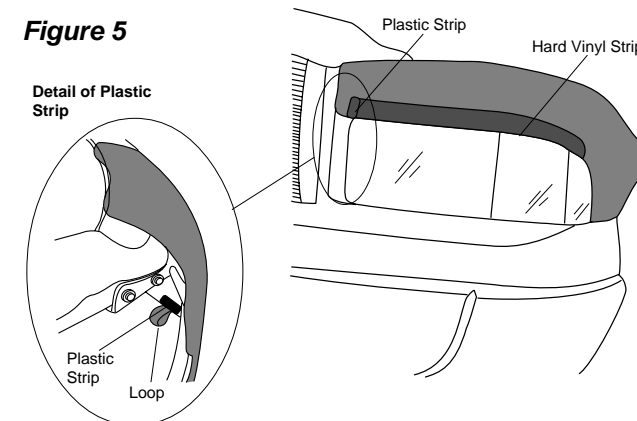


Detail of Plastic Strip  
View from Behind Headlight Panel

*Step Three*

Locate the plastic clip sewn to the bottom of the fender cover, next to the headlight. Hook the clip to the top edge of the bumper.

**Figure 6**

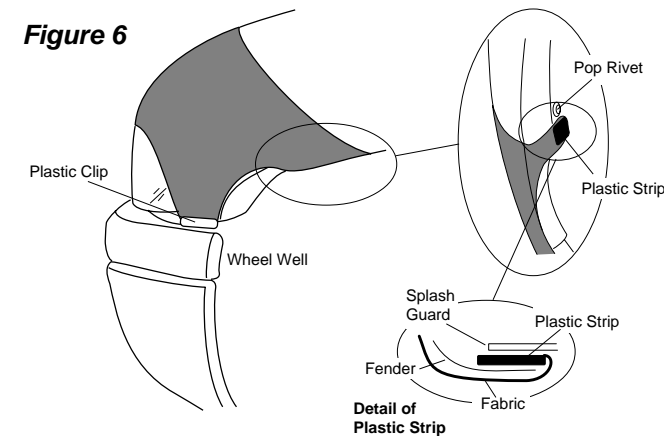


*Step Four*

Locate the plastic strip sewn to the cover in the wheel well (see Figure 6). Slip the strip between the edge of the fender and the splash guard.

*Step Five*

Pull the cover up over the fender and locate the two plastic clips sewn to the top of the cover (see Figure 7). Hook the clips to the top edge of the fender.

**Figure 7**

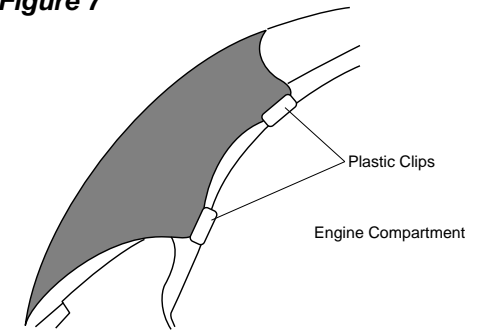

**Note:** Where available, always use the loops sewn to the cover to remove the plastic clips. DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER. When removing the cover, it will be easiest to reverse the installation steps.

*"This completes the installation of your custom-designed front end cover."*