

# LeBra®

## Owner's Manual

### Model #55715 - LeBra® Chevrolet Silverado Fullsize Pickup


#### About Your Global Accessories Product

Congratulations on your purchasing decision. Global Accessories, Inc. designed the LeBra® Front End Cover to be the very best available. With proper care, your LeBra® Front End Cover will provide years of stylish looks and maximum protection.

Installation of the LeBra® Front End Cover is a simple process that should take about 30 minutes. Removal and reinstallation (as for car washing) takes just a few minutes.

If you encounter any problems during the installation of your LeBra® Front End Cover, please contact our Consumer Response Department, Monday - Friday, 9AM - 4PM (MST) at 1-800-950-9502.

**Note:** Please read this manual thoroughly before beginning the installation. After completing installation, keep this manual for further reference.

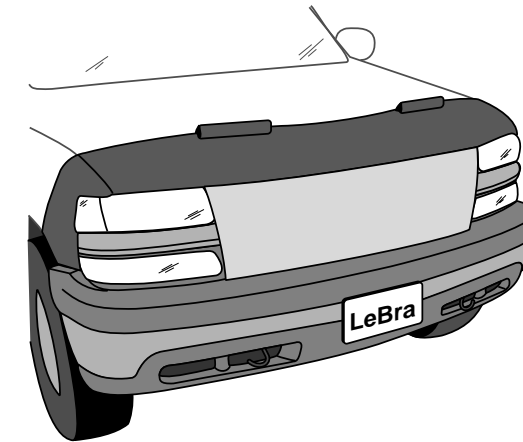

#### Tips for Easier Installation and Care

- [] Before Installation, wash and wax your vehicle. Use a paste wax—not a spray—on the hood and fenders in order to maintain the finish underneath the LeBra® Front End Cover.
- [] Install the LeBra® Front End Cover in temperatures of 70°F (21°C) or higher. The warmth will make the fabric more pliable and will allow it to stretch slightly for a tighter and smoother fit.
- [] Do not use vinyl cleaners or protectants on your LeBra® Front End Cover. These cleaners reduce the breathability of the vinyl and will void the Global Accessories Warranty.
- [] Do not install the LeBra® Front End Cover on any vehicle that does not still have its original factory paint. Global Accessories will not be held liable for any warranty claims of paint damage to repainted vehicles.
- [] Remember that the LeBra® Front End Cover also protects paint from fading due to sunlight while the rest of the car is exposed. Global Accessories will not be held liable for any warranty claims on sun-faded paint.
- [] **Caution:** There may be elastic straps described in some sections of this manual that can snap back if not properly hooked. To avoid injuries, exercise caution and use safety glasses when installing.
- [] Where available, always use the loops sewn to the cover to remove the plastic clips. DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER. When removing the cover, it will be easiest to reverse the installation steps.

<b>Contents</b>	
Parts List	Pg. 2
Installation Instructions	Pg. 2
Hood Cover	Pg. 2
Front End Cover	Pg. 3

**Unpacking: What You Have**

Remove all parts from the shipping container. Check each part included against the following Parts List and look for any possible damage from shipping.

**Parts List**

Item	Description	Qty
1	Cover, hood	1
2	Cover, fender - right	1
3	Cover, fender - left	1
4	Screen, grille	1
5	Warranty	1
6	Care and Maintenance Pamphlet	1

The right side of the fabric is indicated as:



**The Hood Cover**

One of the features that makes your LeBra® Front End Cover the very best available is the separate Hood Cover. This means that you can access the engine compartment without removing or adjusting the cover. Install the Hood Cover first, by following these steps:

*Step One*

Open the hood and slip the Hood Cover over the front edge of the hood. Make sure that the corners of the hood fit snugly into the corners of the Hood Cover. When the Hood Cover fits snugly, stretch the fabric at straps to remove major wrinkles.


*Step Two*

Pull one of the straps sewn to the Hood Cover to the hole in the rear of the hood's underside as shown in Figure 1. Adjust the Buckle Hook so that it is about 1/2" away from the hole. Now pull the strap down and slip the Buckle Hook into the hole. To release the tension on the webbing for adjustment of the strap, simply pull out on the tab on the Buckle Hook (see Figure 2).


The Strap should be quite taut (as taut as possible without tearing). Relocate the Buckle Hook if necessary to tighten. Tie off excess strap to keep free of the engine compartment. Repeat this process for the other side.

*Note: Check all straps periodically to insure tension. Adjust tightness if necessary.*

**Figure 1**

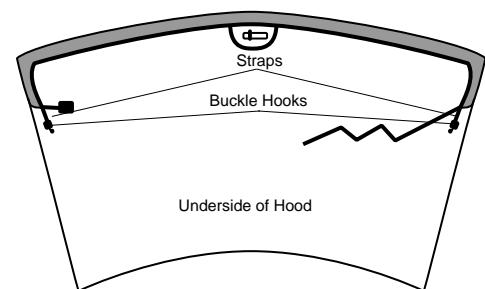


**Figure 2**

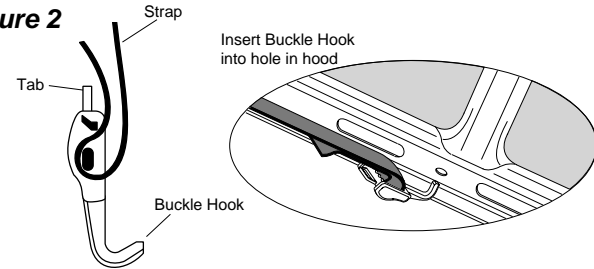

*Step Three*

With the Hood Cover in place, pull the fabric on the sides of the hood around to the underside of the hood on both sides. This will insure maximum tightness of the Hood Cover (see Figure 3).


**Figure 3**

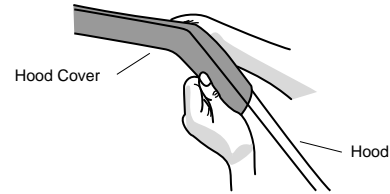

*Step Four*

The remaining strap provides better tension and stability for the cover. Stretch the remaining strap across the underside of the hood, through the loop sewn to the front of the cover and thread it through the buckle on the opposite side (see Figure 4a). Do not twist the strap. Pull the end of the strap straight in line with the buckle to remove slack. DO NOT OVERTIGHTEN. Loop the excess strap back through the buckle to keep it out of the engine compartment (see Figure 4b).

**Figure 4**

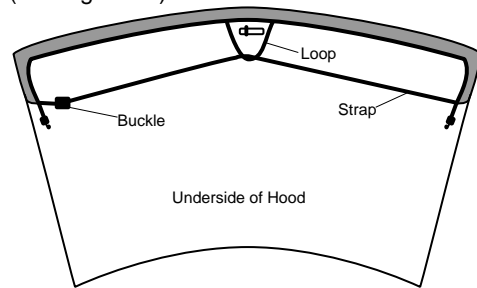

**Figure 4a**



**Figure 4b**



**Figure 4c**



**Installing the Fender Covers**

This section explains how to install the fender cover portion of your LeBra® Front End Cover.


*Step One*

Orient the cover on the vehicle. The bottom of the cover will be stamped on the inside.

*Step Two*

Locate the 4" plastic clip sewn along the bottom of the cover (see Figure 5). Hook the clip to the bottom of the fender, above the bumper.


**Figure 5**

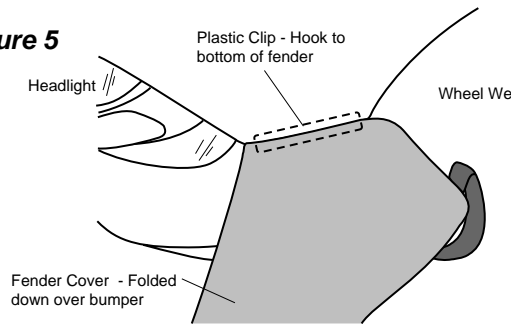

*Step Three*

Pull the cover up and locate the clear plastic sewn to the cover along the edge of the headlight opening (see Figure 6). Slip the plastic between the edge of the fender and the headlight.


**Figure 6**

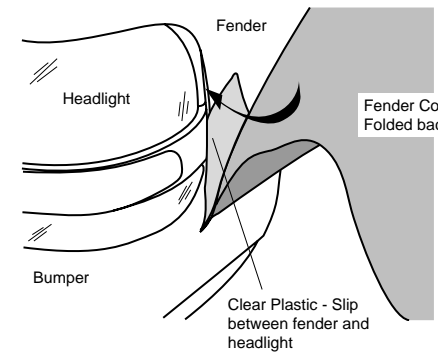

*Step Four*

Pull the sides of the cover up over the fender and slip the pocket sewn into the cover over the front corner of the fender above the headlight. Locate the plastic clip sewn to the cover (see Figure 7). Fold the foam along the side of the engine compartment back and hook the clip to the ledge underneath.

**Figure 7**

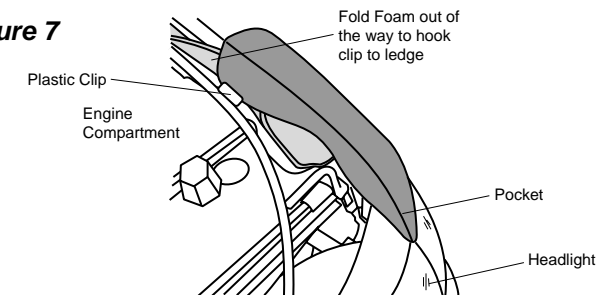


*Step Five*

Locate the web strap and buckle hook sewn to the cover in the wheel well (see Figure 8). Hook the strap into the hole as on the Hood Cover and tighten the strap.

*Note: On the passenger side of the vehicle, you may need to lift up slightly on the splash guard to access the hole.*

**Figure 8**

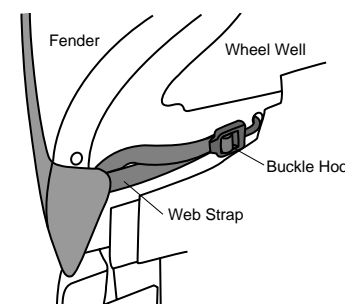

*Step Six*


Repeat this procedure with the other Fender Cover.

**Installing the Grille Screen**

*Step One*

Orient the Grille Screen on the vehicle with the web straps on the top corners of the screen. Center the cover over the grille and locate the four plastic clips sewn along the bottom of the screen. Hook them to the back edge of the bumper (see Figure 9).


**Figure 9**

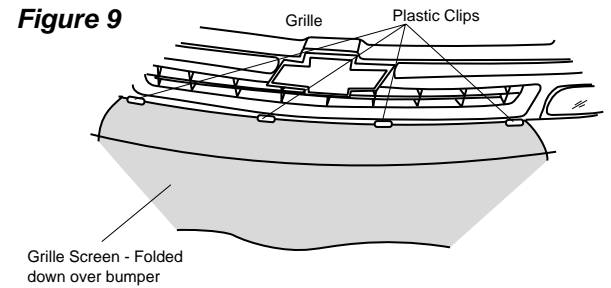

*Step Two*

Pull the Grille Screen up over the grille and locate the plastic clip sewn to the top of the cover in the center (see Figure 10). Hook the clip to the ledge in front of the hook latch release. Then locate the web straps and buckle hooks sewn to the top corners of the screen. Hook the straps into the hole in the shield on each side of the engine compartment (see Figure 10).

**Figure 10**

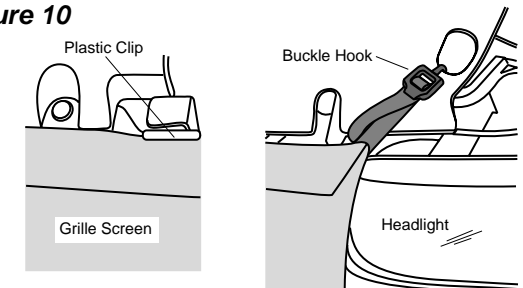

**Note: Where available, always use the loops sewn to the cover to remove the plastic clips. DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER. When removing the cover, it will be easiest to reverse the installation steps.**

*"This completes the installation of your custom-designed front end cover."*