

LeBra®

Owner's Manual

Model #55910 - Ford F-150 Pickup with Foglights & with Tow Hooks


About Your Global Accessories Product

Congratulations on your purchasing decision. Global Accessories, Inc. designed the LeBra® Front End Cover to be the very best available. With proper care, your LeBra® Front End Cover will provide years of stylish looks and maximum protection.

Installation of the LeBra® Front End Cover is a simple process that should take about 30 minutes. Removal and reinstallation (as for car washing) takes just a few minutes.

If you encounter any problems during the installation of your LeBra® Front End Cover, please contact our Consumer Response Department, Monday - Friday, 9AM - 4PM (MST) at 1-800-950-9502.

Note: Please read this manual thoroughly before beginning the installation. After completing installation, keep this manual for further reference.

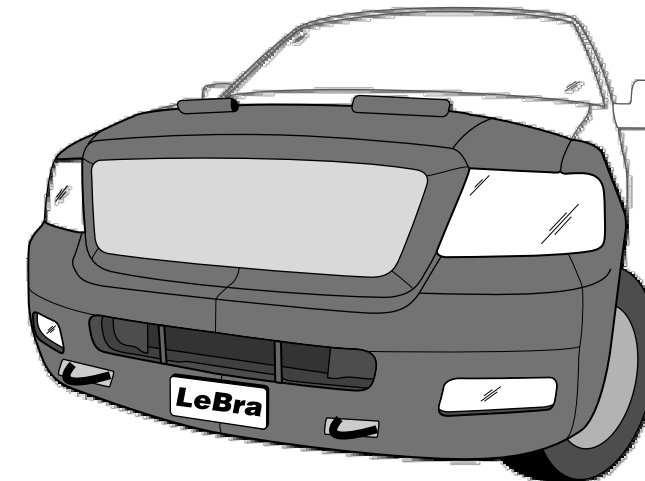

Tips for Easier Installation and Care

- [] Before Installation, wash and wax your vehicle. Use a paste wax—not a spray—on the hood and fenders in order to maintain the finish underneath the LeBra® Front End Cover.
- [] Install the LeBra® Front End Cover in temperatures of 70°F (21°C) or higher. The warmth will make the fabric more pliable and will allow it to stretch slightly for a tighter and smoother fit.
- [] Do not use vinyl cleaners or protectants on your LeBra® Front End Cover. These cleaners reduce the breathability of the vinyl and will void the Global Accessories Warranty.
- [] Do not install the LeBra® Front End Cover on any vehicle that does not still have its original factory paint. Global Accessories will not be held liable for any warranty claims of paint damage to repainted vehicles.
- [] Remember that the LeBra® Front End Cover also protects paint from fading due to sunlight while the rest of the car is exposed. Global Accessories will not be held liable for any warranty claims on sun-faded paint.
- [] **Caution:** There may be elastic straps described in some sections of this manual that can snap back if not properly hooked. To avoid injuries, exercise caution and use safety glasses when installing.
- [] Where available, always use the loops sewn to the cover to remove the plastic clips. **DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER.** When removing the cover, it will be easiest to reverse the installation steps.

Contents	
Parts List	Pg. 2
Installation Instructions	
Hood Cover	Pg. 2
Front End Cover	Pg. 3

Unpacking: What You Have

Remove all parts from the shipping container. Check each part included against the following Parts List and look for any possible damage from shipping.

Parts List

Item	Description	Qty
1	Cover, hood	1
2	Cover, front end	1
3	Warranty	1
4	Care and Maintenance Pamphlet	1

The right side of the fabric is indicated as:



The Hood Cover

One of the features that makes your LeBra® Front End Cover the very best available is the separate Hood Cover. This means that you can access the engine compartment without removing or adjusting the cover. Install the Hood Cover first, by following these steps:

Step One

Open the hood and slip the Hood Cover over the front edge of the hood. Make sure that the corners of the hood fit snugly into the corners of the Hood Cover. When the Hood Cover fits snugly, stretch the fabric at straps to remove major wrinkles. NOTE: Do not attach grill screen at this time.

Step Two

Locate the four web straps with Buckle Hooks sewn to the cover, two long and two short. (Hook long straps first). Hook them into the holes in the rear of the hood's underside, as shown in Figure 1. Adjust the Buckle Hook so that it is about 1/2" away from the hole. Then pull the strap down and slip the Buckle Hook into the hole. To release the tension on the webbing for adjustment of the strap, simply pull out on the tab on the Buckle Hook (see Figure 2).

Figure 1


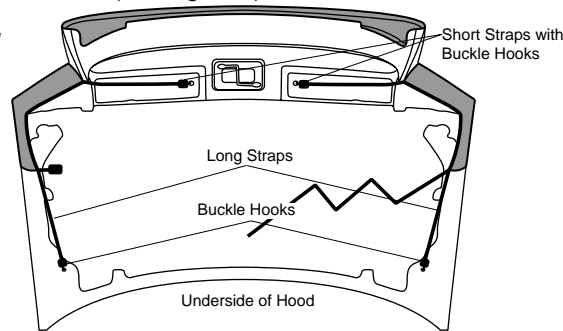


Figure 2

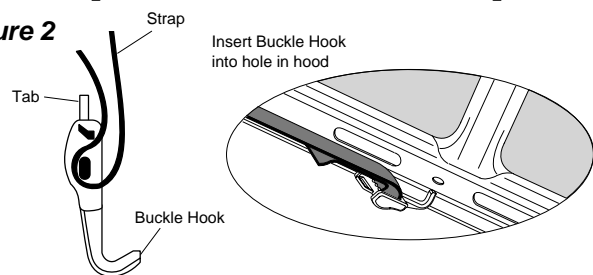


The Strap should be quite taut (as taut as possible without tearing). Relocate the Buckle Hook if necessary to tighten. Tie off excess strap to keep free of the engine compartment. Repeat this process for the other side.

Step Three

With the Hood Cover in place, pull the fabric on the sides of the hood around to the underside of the hood on both sides. This will insure maximum tightness of the Hood Cover (see Figure 3).

Figure 3

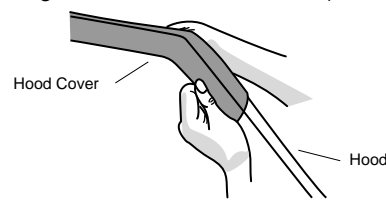

Step Four

The remaining strap provides better tension and stability for the cover. Stretch the strap across the underside of the hood and thread it through the buckle on the opposite side (see Figure 4a). Do not twist the strap. Pull the strap to remove slack. DO NOT OVERTIGHTEN. Loop the excess strap back through the buckle to keep it out of the engine compartment (see Figure 4c). Again, make sure the strap is taut.

Note: Check all straps periodically to insure tension. Adjust tightness if necessary.

Figure 4a



Figure 4b





Figure 4c



Step Five

Locate the three pieces of Velcro® sewn to the back of the hoodcover (see Figure 5). Clean the areas directly across from the Velcro® with a 50/50 solution of water and rubbing alcohol and allow to dry. Remove the adhesive hook from the loop, peel the backing off and attach the hook to the underside of the grill. Attach the loop firmly to the hook.


Figure 5

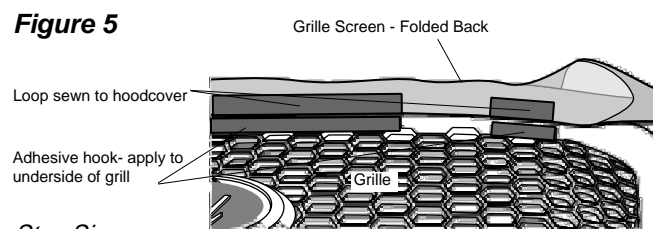

Step Six

Locate the five plastic strips sewn to the front of the cover, three along the front and one on each side (see Figure 6). Slip them into the opening along the edge of the hood.

Figure 6

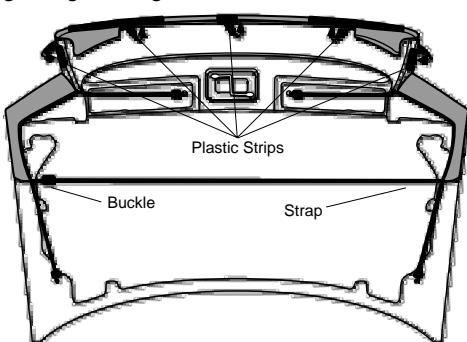

Installing the Front End Cover

This section explains how to install the front cover portion of your LeBra® Front End Cover.

Note: Instructions for license plate opening. Cut out the indented, rectangular area in the center of the cover, if you choose to use your front license plate. Be sure to cut **inside** and as close to the indentation as possible.

Note: Turn the wheels for easier access to the wheel wells.


Step One

Orient the cover on the vehicle and slip it over the license plate if necessary. The bottom of the cover will be stamped on the inside.

Step Two

Pull the cover back to one of the wheel wells and locate the four plastic clips sewn to the cover in the wheel well (see Figure 6). Hook them to the edge of the fender. Pull the cover around the front of the vehicle and attach it to the opposite wheel well.


Figure 6

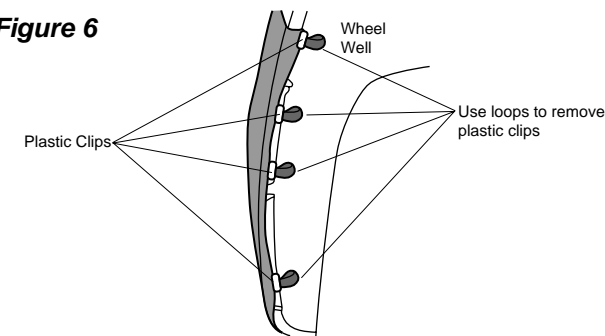

Step Three

Pull the cover up over the bumper and locate the reinforced pockets sewn to the cover below each headlight opening (see Figure 7). Slide the pockets as far as possible under the headlights.


Figure 7

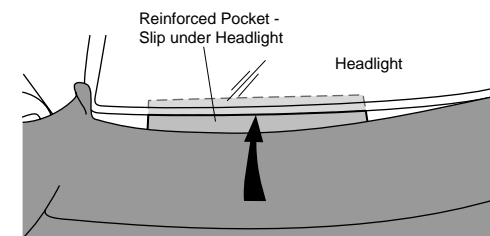

Step Four

Locate the four plastic clips sewn to the top of the cover between the headlights (see Figure 8). Hook them to the back edge of the bumper.


Figure 8

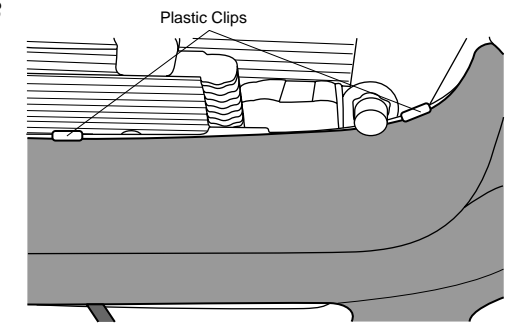

Step Five

Locate the seven plastic clips sewn to the bottom of the cover, five across the front and one under each fender. Hook them to the ledge under the vehicle (see Figure 9).


Figure 9

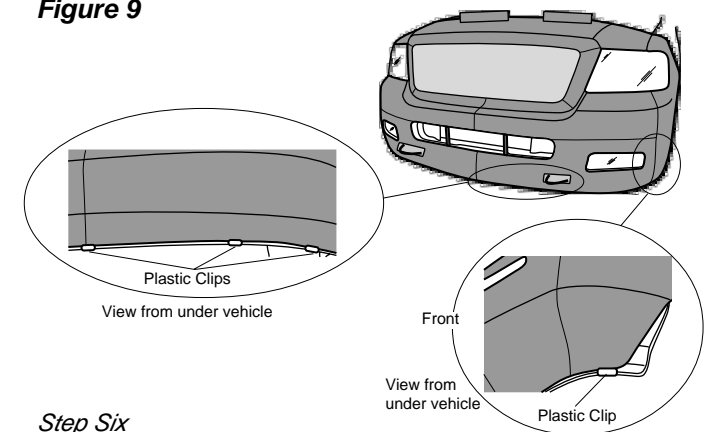

Step Six

Pull the cover up over the fenders and slip the pockets sewn into the cover over the front corners of the fenders above the headlights (see Figure 10). Then locate the plastic clips sewn to the cover on each side of the vehicle and hook them to the ledge on each side of the engine compartment.

Figure 10

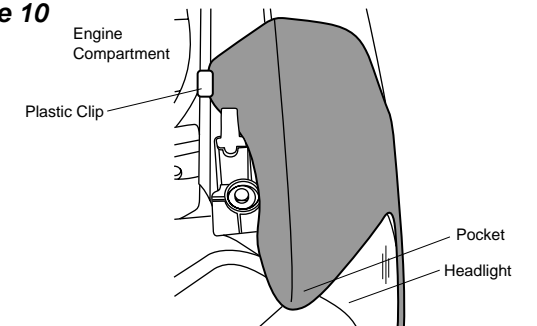

Note: Where available, always use the loops sewn to the cover to remove the plastic clips. DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER. When removing the cover, it will be easiest to reverse the installation steps.

"This completes the installation of your custom-designed front end cover."